

S40

Quick coupler 2-6 tonnes



Casted quick coupler with Front Pin Hook safety solution

The S40 quick coupler is used to connect and disconnect work tools for compact excavators. It follows the symmetrical standard and has either a mechanical locking function (semi-automatic) or hydraulic locking function (automatic).

One advantage of casting is that the material can be optimized to give strength where needed and eliminated where it is not needed. The result is an unrivalled relation between strength and weight.


The quick coupler is equipped with safety hooks that secure the work tools front shaft to reduce the risk of dropping the work tool. We call this Front Pin Hook (FPH). The quick coupler complies with all relevant safety regulations such as EN474-5 and ISO 13031:2023.

Our expander pin technology ensures a play free connection to reduce wear and extend the life of your equipment.



🔧 Measurement

Type	S40	S40wide
Building height (mm)	95	125
Weight from (kg)	30	40
Width (mm)	198	270
Length (mm)	300	300
Pin diameter (mm)	35-45	45-50
Max width dipper arm (mm)	160	200
Pin distance, cc measure (mm)	160-270	235-310

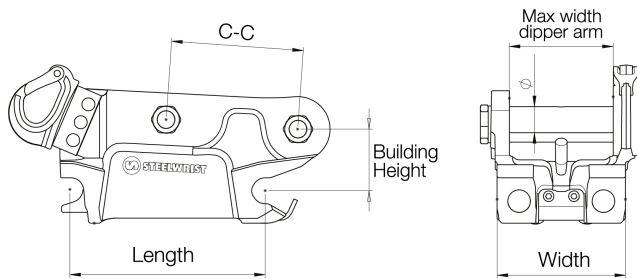

⚙️ Technical specification

Type	S40	S40wide
Recommended machine weight (tonnes)	2-6	2-6
Lifting hook, option (tonnes)	2	2
Front Pin Hook	Yes	Yes
Body	Casted	Casted