

S40

퀵 링크 2-6 톤



프론트핀훅 안전장치 장착된 주강 전용링크

The S40 quick coupler is used to connect and disconnect work tools for compact excavators. It follows the symmetrical standard and has either a mechanical locking function (semi-automatic) or hydraulic locking function (automatic).

One advantage of casting is that the material can be optimized to give strength where needed and eliminated where it is not needed. The result is an unrivalled relation between strength and weight.


The quick coupler is equipped with safety hooks that secure the work tools front shaft to reduce the risk of dropping the work tool. We call this Front Pin Hook (FPH).

The quick coupler complies with all relevant safety regulations such as EN474-5 and ISO 13031:2023.

Our expander pin technology ensures a play free connection to reduce wear and extend the life of your equipment.



측정		
형식	S40	S40wide
몸체높이 (밀리미터)	95	125
무게 (키로그램)	30	40
폭 (밀리미터)	198	270
길이 (밀리미터)	300	300
핀 직경 (밀리미터)	35-45	45-50
암끝단 최고폭 너비 (밀리미터)	160	200
핀간거리, 중심 간 측정 (밀리미터)	160-270	235-310

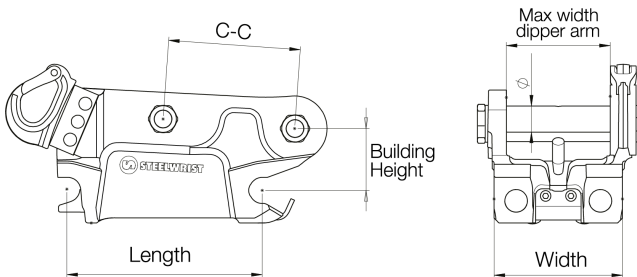

기술자 시방서		
형식	S40	S40wide
권하는 장비 무게 (톤)	2-6	2-6
吊钩, 选配 (톤)	2	2
Front Pin Hook	예	예
몸체	이빨 옵션	이빨 옵션

